





Electric Diagram SPST

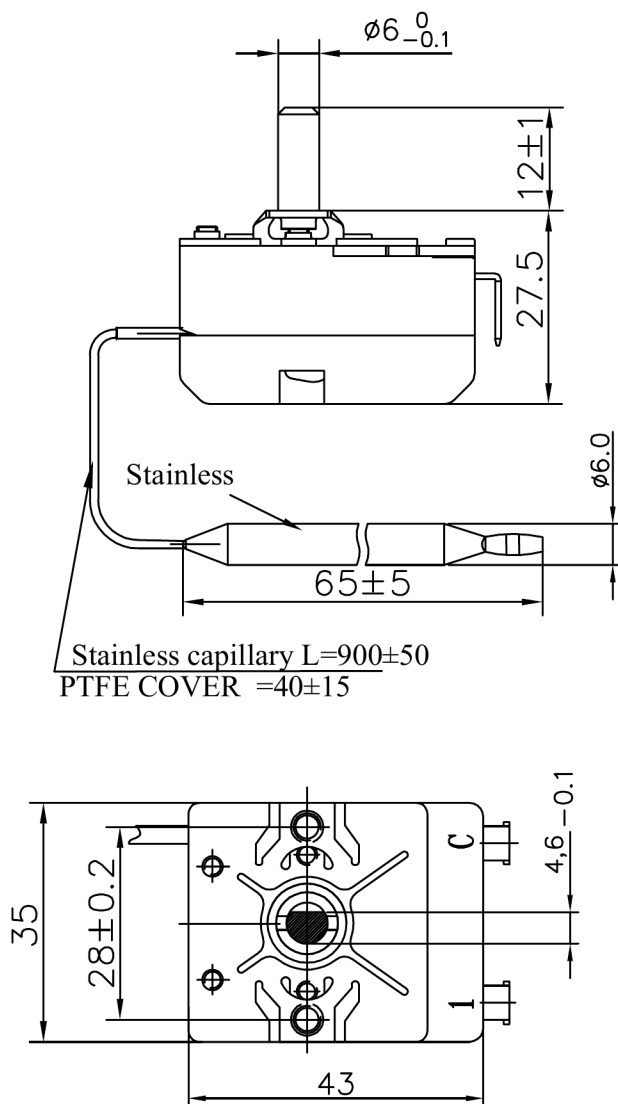

Rotating Angle



Technical Parameter

- H/off: $200 \pm 8^\circ\text{C}$
- L/off: (30°C)
- Breaking capacity:
C-1 20A 250V~
- Minimum current: 200mA
- Dielectric Strength: AC 2000V 1min
- Insulation Resistance: $> 100\text{M}\Omega$
- Temperature change speed: $< 1.0^\circ\text{C}/\text{min}$
- Maximun temperature:
Around the Switch Body: $T125^\circ\text{C}$
Around the Sensing Bulb: 240°C
- Rotating Torque of
Adjustment Shaft: $< 0.2\text{Nm}$
- Life of Product: $> 100,000$ Cycles

REMARK:

1. The operating temperature above is at 25°C ambient temperature (temperature around the switch body), if the ambient temperature changes, the operating temperature need to modified.
- 2.The scheme shows the H(high) temperature position.
3. Mounting screws must not touch thermostat body. Please use screws with proper length (5mm recommended).

				零部件名称/PART NAME:			HENG THERM MODEL	
				温控器 Thermostat			HTR-C402	
标 记 SIGN	更改文件号 ECN NO.	更 改 人 CHANGER	日期/DATE	版 次 号 VERSION	数 量 QTY	比 例 SCALE	颜 色 COLOUR	
设计/DESIGNED		日期/DATE		1			PROPERTY OF: GUANGZHOU HENG THERM THERMOSTAT LTD.	
审核/CHECKED		日期/DATE						
批准 /APPROVED		日期/DATE		第 张共 张 CURENT NO. OF				