



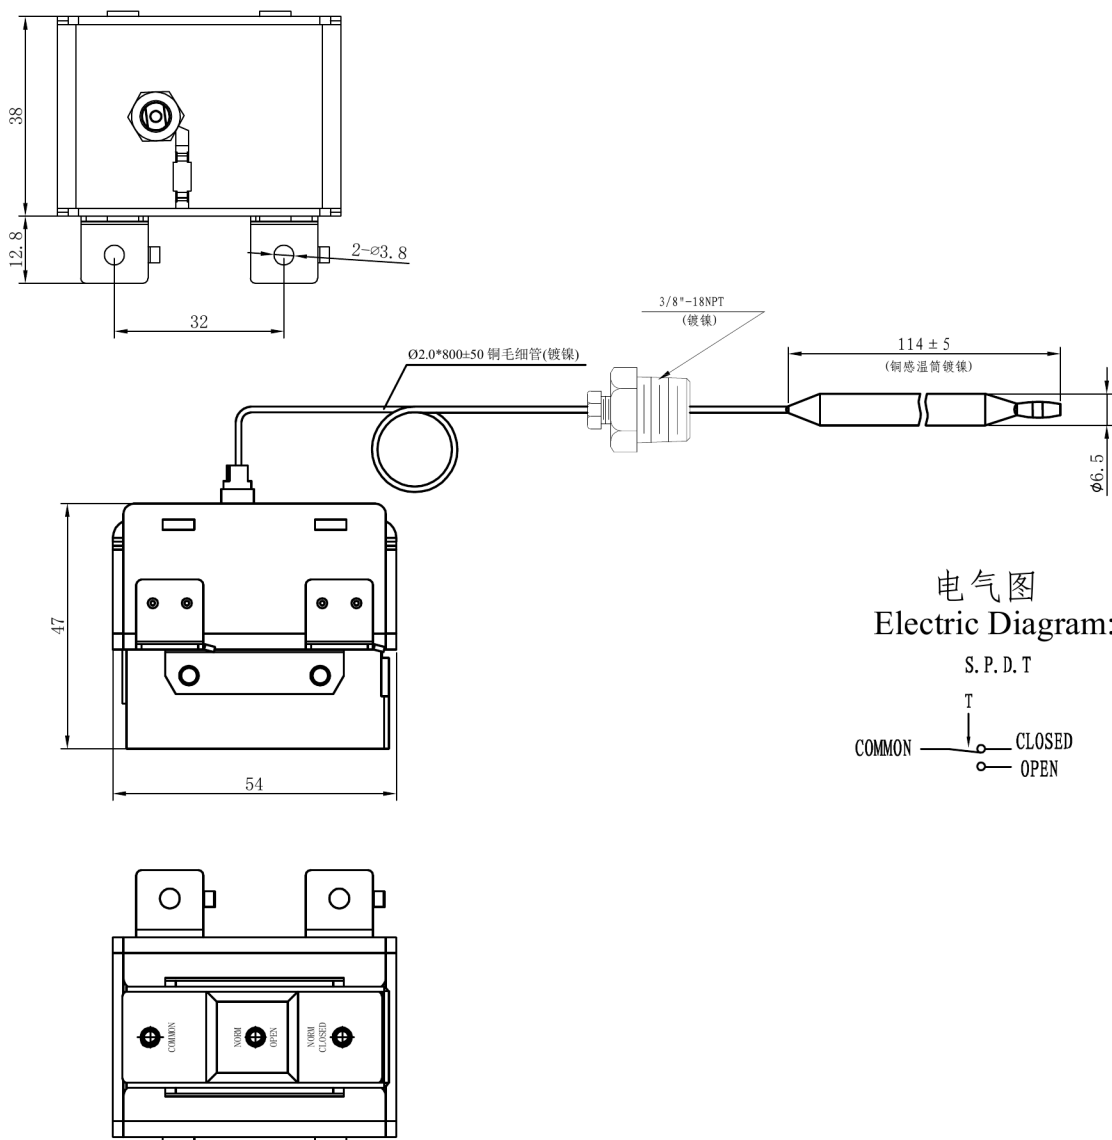

电气图
Electric Diagram:



- 1, 主体耐温 (MAXIMUM BODY TEMPERATURE) T105° C
- 2, 额定功率 (RATING): 0-1A
0-50VDC
- 3, 感温探头耐温 (TEMPERATURE LIMITS ON THE PHIAL)<280° C
- 4, 所示温度指最高断开温度值232 ± 8° C (THE INDICATED TEMPERATURES 232 ± 8° C ARE DISCONNECTION VALUES)
- 5, 测试条件: 环境温度25 ± 3° C, 升温速度1K/min, 毛细管插入液体介质30 ~ 80mm
(TEMPERATURES ARE MEASURED INTRODUCING 30~80mm CAPILLARY, IN THE BATH AND AT AN AMBIENT TEMPERATURE OF 25 ± 3° C AND TEMPERATURE CHANGE SPEED 1° C/min)
- 6, 耐高压强度 (DIELECTRIC STRENGTH) AC 2000V 1min
- 7, 绝缘电阻 (INSULATION RESISTANCE)>100MΩ
- 8, 耐久性 (LIFE OF PRODUCT)>100000 CYCLES

				<u>零部件名称/PART NAME:</u>				HENG THERM MODEL HTR-G602		
				HENG THERM GAS LIMITER						
标 记 SIGN	更改文件号 ECN NO.	更 改 人 CHANGER	日期/DATE	版 次 号 VERSION		数 量 QTY	比 例 SCALE	颜 色 COLOUR		
设计/DESIGNED		日期/DATE		1				PROPERTY OF: GUANGZHOU HENG THERM THERMOSTAT LTD.		
审核/CHECKED		日期/DATE								
批准/APPROVED		日期/DATE		第 张 共 张 SHEET NO. OF						