
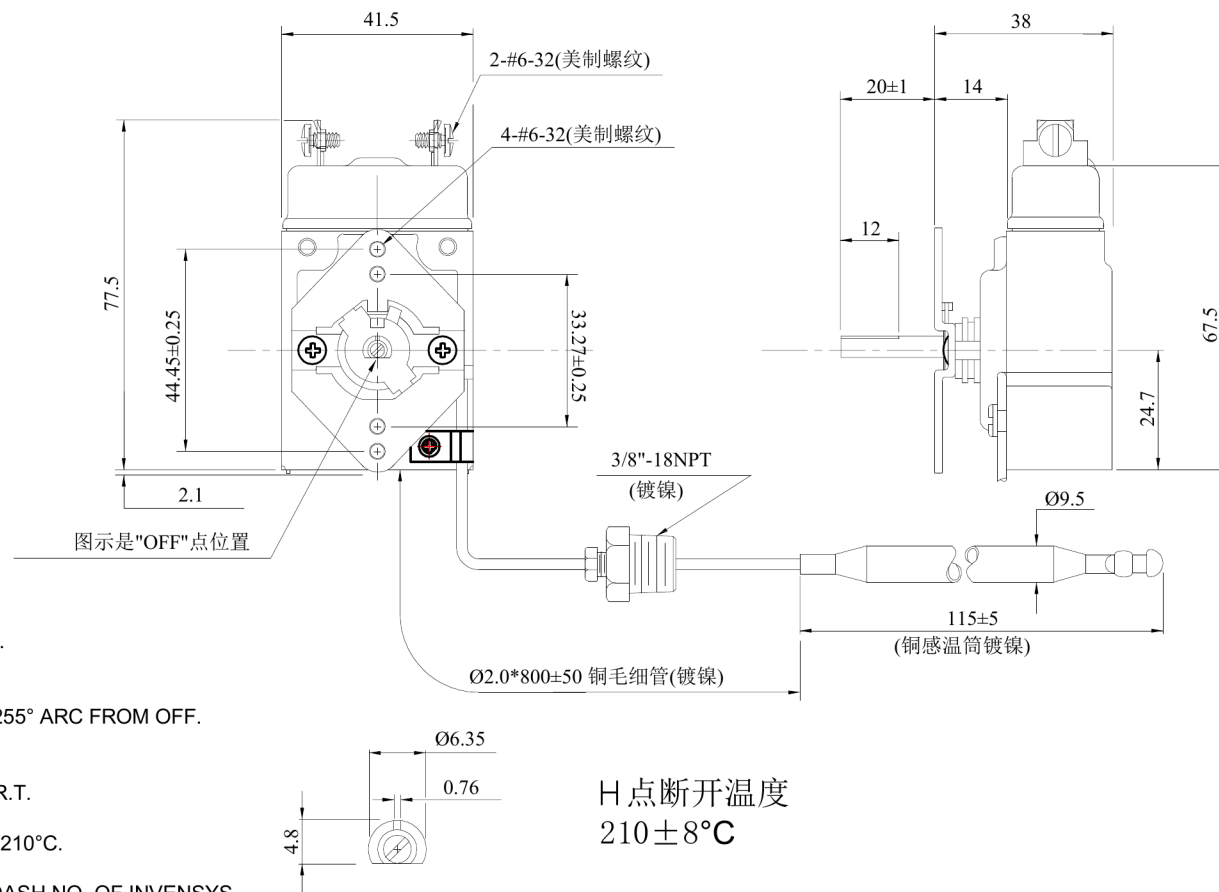


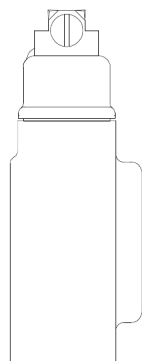

SPECIFICATIONS:

1. FOR USE WITH MILLIVOLT GAS SYSTEMS.
2. RATING: 5 VDC MAX. 0.67A MAX.
3. A. CALIBRATION:
OFF 179.4°/173.9° C WITH ADJ. STEM AT 255° ARC FROM OFF.
MAX DIFFERENTIAL 4.5°C
B. COLD CHECK:
OFF SNAP 87° ARC FROM OFF, BULB AT R.T.
4. 310°±3° ARC DIAL TRAVEL.
5. TEMPERATURE RANGE. OFF TO 80°C TO 210°C.
6. DIAL SPREAD 1.95° ARC PER °C.
7. CAPILLARY LENGTH IN INCHES IS LAST DASH NO. OF INVENSYS PART NO., CAPILLARY TOLERANCE:
8. ALL CALIBRATION CHECKS TO BE PERFORMED WITH BULB AND 152.5±25.4 OF CAPILLARY IN AN AGITATED LIQUID BATH CALIBRATION AND DIFFERENTIAL TO BE TEMPERATURE BATH CHANGE.
9. USE Stainless steel TERMINAL SCREWS ONLY, TIGHTEN TO .906-1.24 N-m.
10. ASSEMBLE PER P-11193.
11. AVOID 90° BENDING AT CAPILLARY TUBE WITHIN THIS SECTION,
IN AREA WHERE 90° IS PERMISSIBLE, MINIMUM BEND RADIUS SHOULD BE .250
12. RECOMMENDED THIGHTENING TORQUE FOR PACKING NUT INTO BUSHING TO EFFECT A SEAL IS 30 TO 40 IN-LBS.

				零件名称/PART NAME:			HENG THERM MODEL	
				温控器 Thermostat			HTR-P502	
标 记 SIGN	更改文件号 ECN NO.	更 改 人 CHANGER	日期/DATE	版 次 号 VERSION	数 量 QTY	比 例 SCALE	PROPERTY OF: GUANGZHOU HENG THERM THERMOSTAT LTD.	
设计/DESIGNED			日期/DATE	1				
审核/CHECKED			日期/DATE					
批准/APPROVED			日期/DATE	第 SHEET NO.	张共 OF	张		