



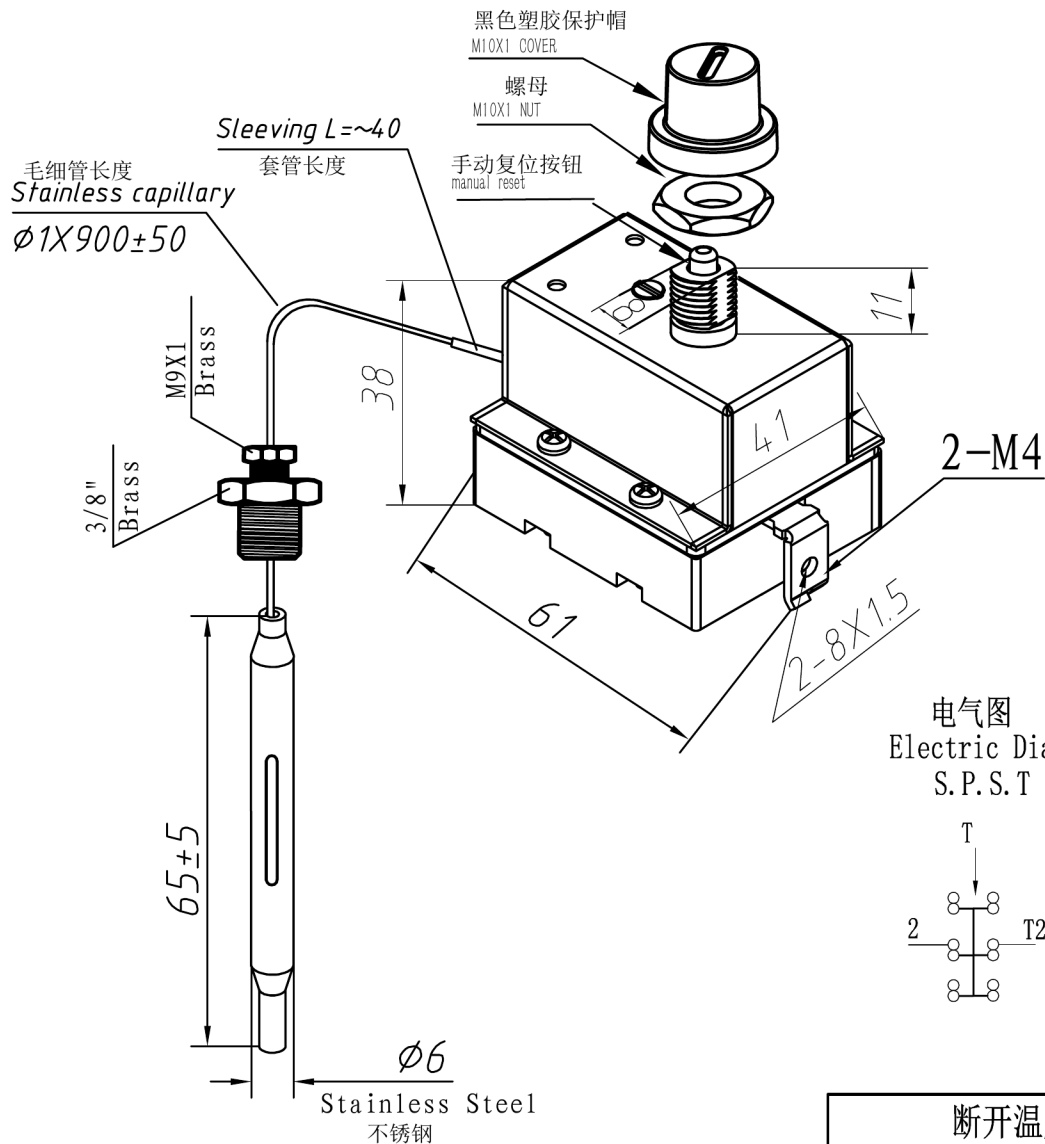

电气图
Electric Diagram:
S.P.S.T

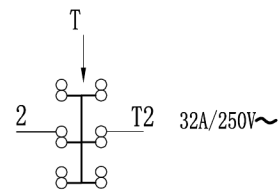

断开温度
DISCONNECTION TEMPERATURE
 $230 \pm 8^{\circ} \text{C}$

技术要求 (NOTES)

- 1, 主体耐温 (MAXIMUM BODY TEMPERATURE) $T125^{\circ} \text{C}$
- 2, 通过电流 (POWER SUPPLY) 1-32A/250V~
- 3, 感温探头耐温 (TEMPERATURE LIMITS ON THE PHIAL) $<300^{\circ} \text{C}$
- 4, 所示温度指最高断开温度值
(THE INDICATED TEMPERATURES ARE DISCONNECTION VALUES)
- 5, 泄漏自保护 (FAIL SAFE)
- 6, 测试条件: 环境温度 $25 \pm 3^{\circ} \text{C}$, 升温速度 $1\text{K}/\text{min}$, 毛细管插入液体介质 $80 \sim 100\text{mm}$
(TEMPERATURES ARE MEASURED INTRODUCING $80 \sim 100\text{mm}$ CAPILLARY, IN THE BATH AND AT
AN AMBIENT TEMPERATURE OF $25 \pm 3^{\circ} \text{C}$ AND TEMPERATURE CHANGE SPEED $1^{\circ} \text{C}/\text{min}$)
- 7, 耐高压强度 (DIELECTRIC STRENGTH) AC 2000V 1min
- 8, 绝缘电阻 (INSULATION RESISTANCE) $>100\text{M}\Omega$
- 9, 耐久性 (LIFE OF PRODUCT) >6000 CYCLES

				零部件名称/PART NAME:			HENG THERM MODEL	
				Manual Reset Thermostat (SPST)			HTR-S301	
标记 SIGN	更改文件号 ECN NO.	更改人 CHANGER	日期/DATE	版次号 VERSION	数量 QTY	比例 SCALE	颜色 COLOUR	
设计/DESIGNED		日期/DATE		1	1	1:1	PROPERTY OF: GUANGZHOU HENG THERM THERMOSTAT LTD.	
审核/CHECKED		日期/DATE		第	张共	张		
批准/APPROVED		日期/DATE		SHEET NO.	OF			