




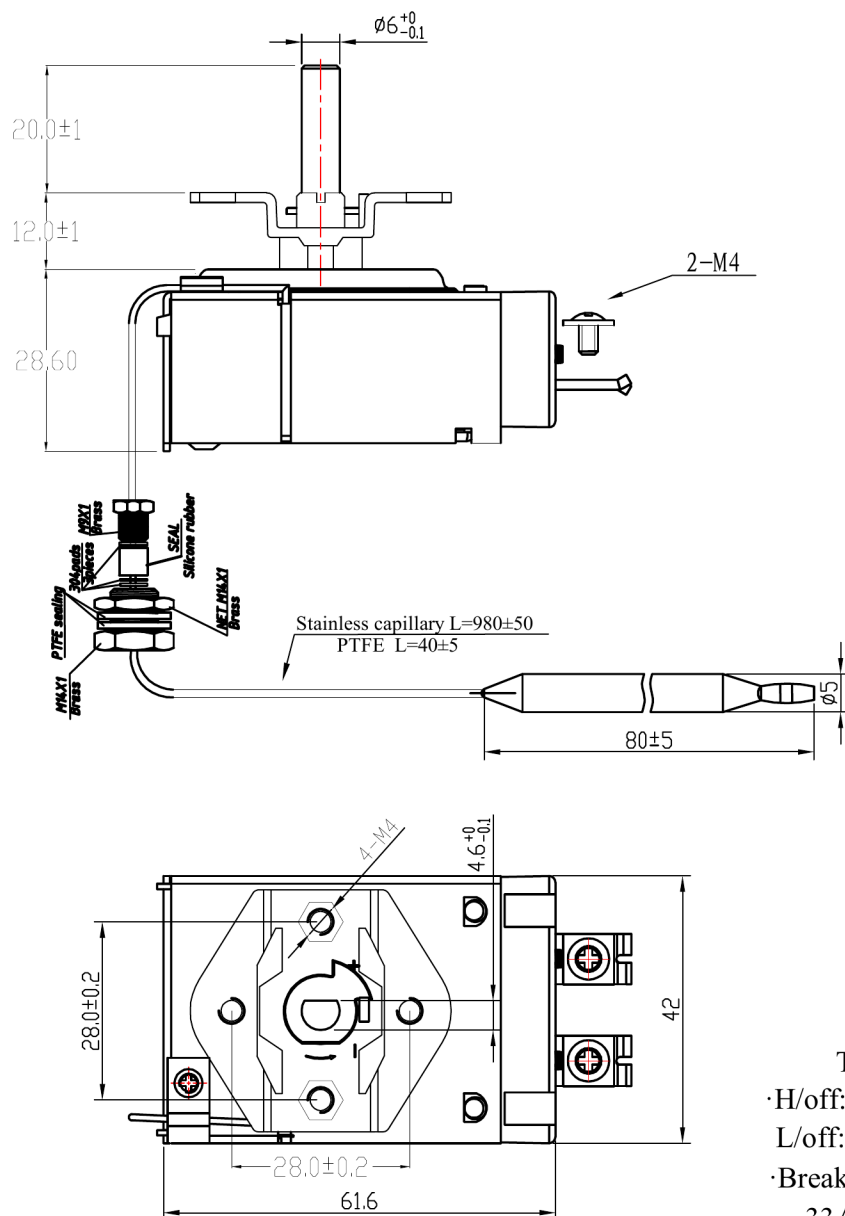

Electric Diagram:



Rotating Angle

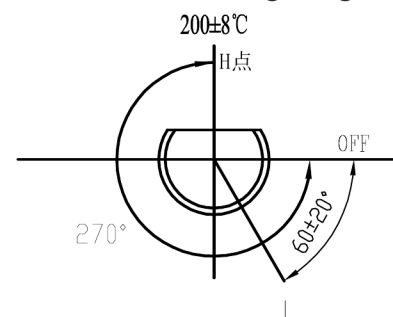

Technical Parameter

- H/off: 200°C±8°C
- L/off: 30°C
- Breaking capacity:
33A 250V~
- Minimum current: 200mA
- Dielectric Strength: AC 1800V 1min
- Insulation Resistance: > 100MΩ
- Temperature change speed: < 1.0°C/min
- Maximum temperature:
Around the Switch Body: T150°C
Around the Sensing Bulb: 240°C
- Rotating Torque of
Adjustment Shaft: <0.2Nm
- Life of Product: > 100,000 Cycles

REMARK:

1. The operating temperature above is at 25°C ambient temperature (temperature around the switch body), if the ambient temperature changes, the operating temperature need to modified.
2. The scheme shows the "H" position.
3. Mounting screws must not touch thermostat body. Please use screws with proper length (5mm recommended).

				零部件名称/PART NAME:			HENG THERM MODEL	
				温控器			HTR-P506	
				Thermostat				
标 记 SIGN	更改文件号 ECN NO.	更 改 人 CHANGER	日期/DATE	版 次 号 VERSION	数 量 QTY	比 例 SCALE	颜 色 COLOUR	
设计/DESIGNED		日期/DATE		1			PROPERTY OF:	
审核/CHECKED		日期/DATE					GUANGZHOU HENG THERM THERMOSTAT LTD.	
批准/APPROVED		日期/DATE		第 张共 张 SHEET NO. OF				