




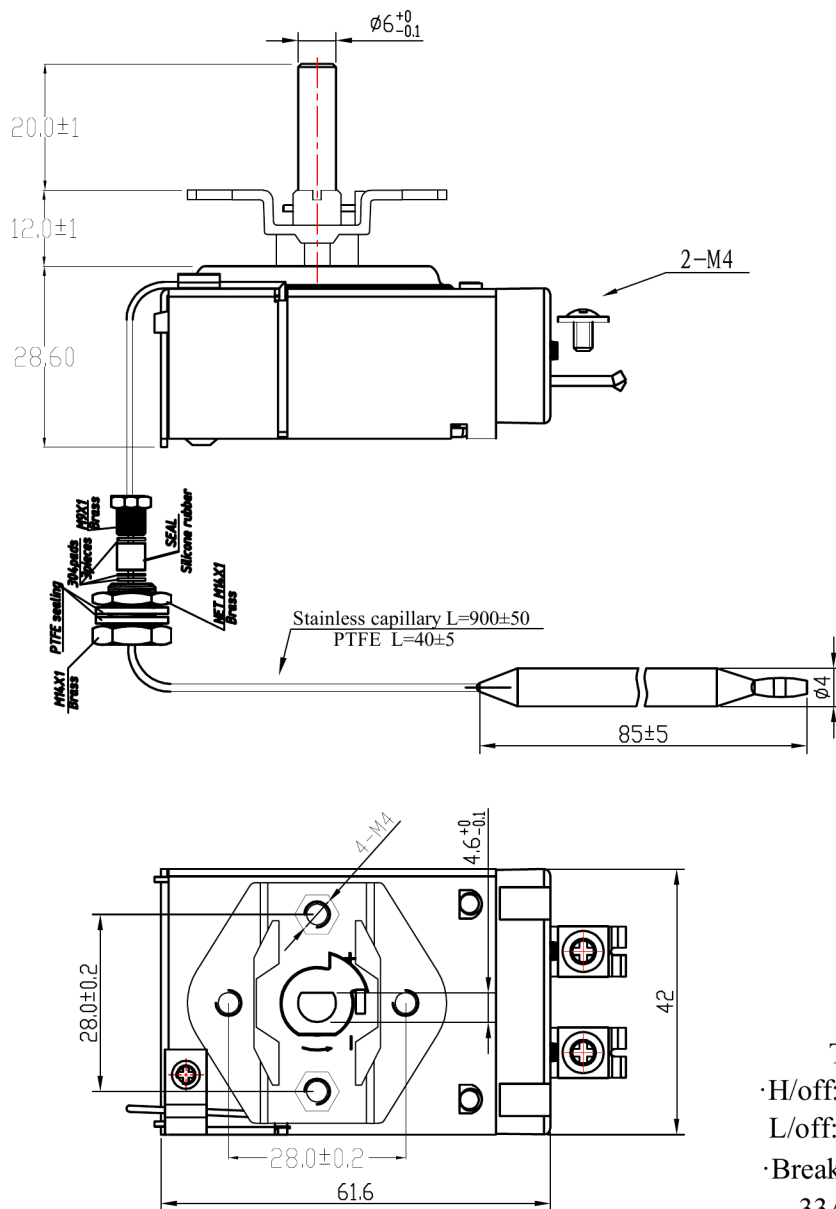

Electric Diagram:



Rotating Angle

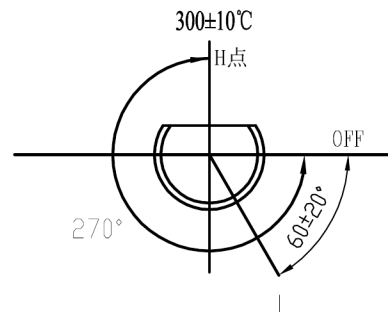

Technical Parameter

- H/off: $300^{\circ}\text{C} \pm 10^{\circ}\text{C}$
- L/off: 50°C
- Breaking capacity:
33A 250V~
- Minimum current: 200mA
- Dielectric Strength: AC 1800V 1min
- Insulation Resistance: $> 100\text{M}\Omega$
- Temperature change speed: $< 1.0^{\circ}\text{C}/\text{min}$
- Maximun temperature:
Around the Switch Body: $T150^{\circ}\text{C}$
Around the Sensing Bulb: 340°C
- Rotating Torque of
Adjustment Shaft: $< 0.2\text{Nm}$
- Life of Product: $> 100,000$ Cycles

REMARK:

1. The operating temperature above is at 25°C ambient temperature (temperature around the switch body), if the ambient temperature changes, the operating temperature need to modified.
- 2.The scheme shows the "H " position.
3. Mounting screws must not touch thermostat body. Please use screws with proper length (5mm recommended).

				零部件名称/PART NAME:			HENG THERM MODEL	
				温控器			HTR-P507	
				Thermostat				
标记 SIGN	更改文件号 ECN NO.	更改人 CHANGER	日期/DATE	版次号 VERSION	数量 QTY	比例 SCALE	颜色 COLOUR	
设计/DESIGNED		日期/DATE		1			PROPERTY OF: GUANGZHOU HENG THERM THERMOSTAT LTD.	
审核/CHECKED		日期/DATE						
批准/APPROVED		日期/DATE		第 SHEET NO.	张共 OF	张		